

Project:	
Model:	Series #:
Dealer:	Quantity#:
Delivery address:	Date:

Top Mounted Series Reach in Solid door

Model#WK-48RF(Dual Temperature Refrigerator/Freezer)



- Precision ventilated refrigeration system keeps food at safe temperature
- Eletronic control system make it easy to adjust temperature set ponit and defrost frequency
- Self closing door with 90 degree stay open feature, locks and keys included
- Preinstalled heavy duty casters with brakes
- Top installation board makes it easy to access condenser coil for cleaning and service
- Stainless steel exterior and interior, ensure longer life
- Top LED light,goes on when door open, goes off when door
- Anti-corrosion coated copper coil evaporator ensure 10 years life of westlake products
- 6 epoxy coated steel wire shelves, 90 lbs loading capacity each
- R290 hydro carbon refrigerant that has zero(0) ozone depletion potential(ODP) & three(3) global warming potential(GWP)

WARRANTY:

- 2 Years Parts and Labor
- 6 Years compressor (Additional 4 years parts only)
- •Westlake is responsible for components failure. but is not responsible for improper operation failure and artificial damage.









Parts & Labor

Conforms to UL&NSF-7 Standards














Top Mounted Series Reach in Solid door


Model# WK-48RF(Dual Temperature Refrigerator/Freezer)


TECHNICAL DATA

Model #	WK-48RF
Temperature range	33~41°F /-8~0°F
Refrigerant	R290
Max Ambient Temperature	100°F
Defrosting	automatic every 4 hours
Horsepower	1/4P+1/2P
Exterior Dimension	48.4*31.5*78
Interior Dimension	19.9*25*55/19.9*25*55
Gross Weight	3881bs
Net Weight	308lbs
Packing Dimension	50*32.3*79.1
Voltage/Phase/Hz	115V/1/60Hz
Amps	5.2
Plug Type	NEMA 5-15P
Electrical Cord Length	70.8

PLAN VIEW

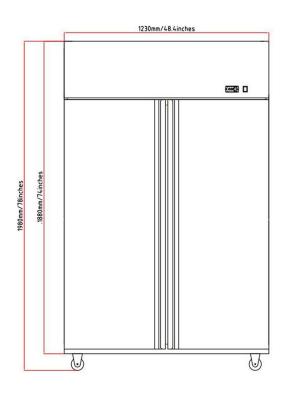

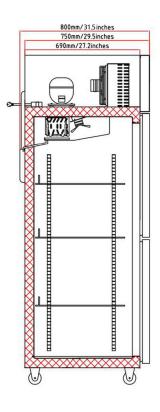



NEMA 5-15P