



Project: _____

Model: _____ Series #: _____

Dealer: _____ Quantity#: _____

Delivery address: _____ Date: _____

Top Mounted Series Reach in Solid door

Model#KM-72R(Refrigerator)



Features


- Precision ventilated refrigeration system keeps food at safe temperature
- Electronic control system make it easy to adjust temperature set point and defrost frequency
- Self closing door with 90 degree stay open feature,locks and keys included
- Preinstalled heavy duty casters with brakes
- Top installation board makes it easy to access condenser coil for cleaning and service.
- Stainless steel exterior and interior, ensure longer life
- Vertical LED light,goes on when door open,goes off when door closed.
- Anti-corrosion coated copper coil evaporator ensure 10 years life of westlake products.
- 9 epoxy coated steel wire shelves, 90 lbs loading capacity each.
- R290 hydro carbon refrigerant that has zero(0) ozone depletion potential(ODP) & three(3) global warming potential(GWP)

WARRANTY:

- 2 Years Parts and Labor
- 6 Years compressor (Additional 4 years parts only)
- westlake is responsible for components failure, but is not responsible for improper operation failure and artificial damage.



Conforms to UL&NSF-7 Standards

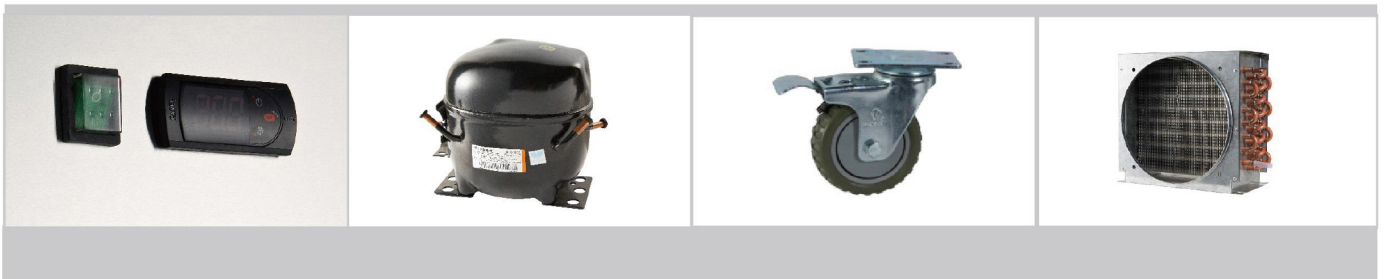



Top Mounted Series Reach in Solid door

Model#KM-72R(Refrigerator)

TECHNICAL DATA

SKU	WK-72R
Model #	KM-72R
Temperature range	33~41°F
Refrigerant	R290
Max Ambient Temperature	100°F
Defrosting	automatic every 4 hours
Horsepower	1/3
Exterior Dimension	72.8*31.5*77.9
Interior Dimension	68.1*23.2*57.1
Gross Weight	447lbs
Net Weight	403lbs
Packing Dimension	75.4*33.2*80.1
Voltage/Phase/Hz	115V/1/60HZ
Amps	2.3
Plug Type	NEMA 5-15P
Electrical Cord Length	70.8

PLAN VIEW

